

SERIES 55, AWWA C515

LARGE DIAMETER DUCTILE

Series 55 AWWA Availability Listing

Size	FLxFL	MJxFL	MJxMJ
18"	X	X *	X
20"	X	X *	X
24"	X	X *	X
30"	X **	X **	X **

* MJxFL Adaptor Kit on FLxFL valve - MJxFL can be used as tapping valve


** Integral Bypass Flanges on long laylength

AWWA C515, LARGE DIAMETER DUCTILE, RESILIENT WEDGE GATE VALVES

Type

**Series 55/FFN
LARGE DIAMETER C515
FLxFL**

Full wall ductile iron
Flanged ends to
ANSI B 16.1,
class 125 NRS
250 PSI
Size 18", 20", 24", 30"

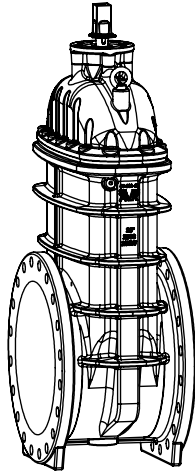

AVK Ref. #

Size

**Weight
kg lb**


**Price
US \$**

55-450-FFN	18"	599	1321	25,745
55-500-FFN	20"	639	1408	30,919
55-600-FFN	24"	856	1886	43,963
55-800-FFN	30"	2434	5366	76,700

30" FLxFL available in laylengths of 26" - Short, and 39" - Long. Long laylength has integral bypass flanges for mounting bypass valve assembly. Specify laylength when ordering. All 30" valves are supplied with actuation.
Use 14"-30" valve discount

**Series 55/MFN
LARGE DIAMETER C515
MJ X FL**

Full wall ductile iron
Mechanical joint end
X Flanged end to ANSI B 16.1
Class 125 NRS
250 PSI
Size 18", 20", 24", 30"




less MJ accessories

55-450-MFN	18"	XXXX	XXXX	25,745
55-500-MFN	20"	XXXX	XXXX	30,919
55-600-MFN	24"	XXXX	XXXX	43,963
55-800-MFN	30"	XXXX	XXXX	76,700

18", 20", 24", FLxFL valve with MJxFL adaptor, less MJ accessories
30", Integral bypass flanges
Use 14"-30" valve discount

**Series 55/MMN
LARGE DIAMETER C515
MJxMJ**

Full wall ductile iron
Mechanical joint ends
250 PSI
Size 18", 20", 24", 30"

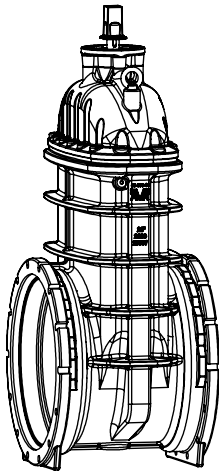

less MJ accessories

55-450-MMN	18"	603	1330	25,745
55-500-MMN	20"	635	1400	30,919
55-600-MMN	24"	847	1867	43,963
55-800-MMN	30"	2472	5450	76,700

30", Integral bypass flanges
Use 14"-30" valve discount